


EN 853 2SN

Hydraulic Hose-No Skive

Brand
TAIYO

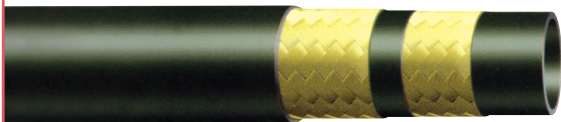

Construction

- Tube : Oil resistant Synthetic Rubber
- Reinforcement : 2 W/B (Two braide of high tensile steel wire)
- Cover : Oil, weather and abrasion resistant Synthetic Rubber

Application and Temperature Range

- Petroleum base hydraulic fluids and lubricating oils within a temperature

Size		I.D.		O.D.		Working Pressure		Min. Burst Pressure		Min. Bend Radius	
Dash	DN	inch	mm	inch	mm	PSI	in bar	PSI	in bar	mm	inch
3	5	3/16	4,8	0,55	14,0	6.010	415	24.040	1.660	90	3,6
4	6	1/4	6,4	0,59	15,0	5.800	400	23.200	1.600	100	4,0
5	8	5/16	8,0	0,65	16,4	5.075	350	20.300	1.400	115	4,6
6	10	3/8	9,6	0,74	18,8	4.800	330	19.200	1.320	130	5,2
8	12	1/2	12,7	0,87	22,0	4.000	276	16.000	1.104	180	7,2
10	16	5/8	15,9	0,99	25,2	3.625	250	14.500	1.000	200	8,0
12	19	3/4	19,1	1,15	29,2	3.100	215	12.400	860	240	9,6
16	25	1	25,4	1,48	37,6	2.400	165	9.600	660	300	12,0
20	32	1.1/4	32,0	1,87	47,5	1.800	125	7.200	500	420	16,8
24	38	1.1/2	38,0	2,14	54,3	1.300	90	5.200	360	500	20,0
32	50	2	51,0	2,64	67,0	1.160	80	4.640	320	630	25,2



FLEXITUBE ENGINEERING SDN. BHD. (1034024-V)
 Tel: 603-6263 9303 / 603-6279 9303 | Fax: 603-6280 6303
 Website: Flexitube.com.my | Email: enquiry@flexitube.com.my